

DOTLESS®

Profili luminosi brevettati e Made in Italy.
Patented lighting profiles, Made in Italy.



Profili LED flessibili con luminosità uniforme, realizzati in elastomero siliconico co-estruso, termo-dissipante (Heatless) con circuiti e LED di alta qualità.

Il materiale siliconico perlescente di protezione è flessibile e quindi facilmente adattabile a molte superfici, inoltre è stabilizzato UV per una migliore resistenza agli agenti atmosferici. Dotless può essere tagliato e giuntato, seguendo le apposite istruzioni, nelle più svariate composizioni. Luce costante ed uniforme, resistenza all'acqua, facilità di installazione, bassi consumi, lunga vita del sistema manutenzione quasi inesistente, sono le caratteristiche principali di questo innovativo prodotto.

LED flexible profiles with point brightness, realized in extruded silicone rubber with thermo-dissipating (Heatless) and LED circuits of high quality.

The pearlescent silicone protective material is flexible and therefore easy-fitting to many surfaces, moreover it has outstanding resistance to sunlight (UV-IR), weathering and atmospheric agents. Dotless can be cut and jointed, following the instructions, to make a vast array of compositions. Constant and uniform light, water resistance, easy installation, low consumption, long life, minimal maintenance, are the main features of this innovative product.

DOTLESS ROUND TOP LED SMD 3528

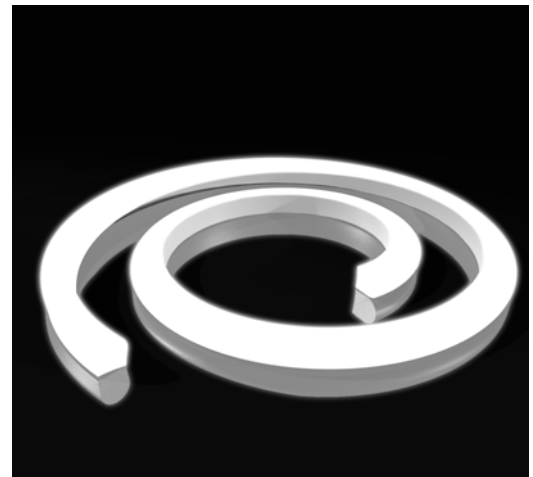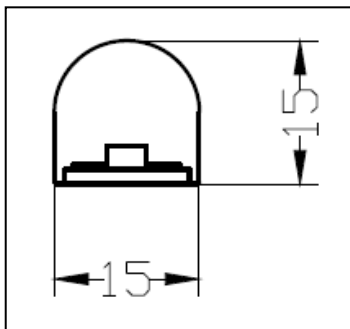

HEATLESS®

MONOCROMATICO / MONOCHROMATIC



| LED/MT LED/MT | VOLT Vdc VOLT Vdc | TIPO LED TYPE OF LED | WATT/ MT WATT/ MT | FASCIO BEAM | COLORE LUCE LED** LED LIGHT COLOR** | UNITA' DI TAGLIO CUTTING UNIT | LUMEN/ MT LUMEN/ MT | LUMEN/ W LUMEN/ W |
|------------------|----------------------------|-------------------------------------|----------------------------|----------------|--|--|------------------------------|----------------------------|
| 120LED/mt | 24V* | TOP LED 3528 SUPER BRIGHTNESS | 14,4W | 120° | Bianco Caldo 3200K | 50mm (24V) | 608 lm | 42,22 lm |
| | | | | | Bianco Neutro 4200K | | 640 lm | 44,44 lm |
| | | | | | Bianco Freddo 5800K | 25mm (12V) | 672 lm | 46,67 lm |
| | | | | | Warm White 3200K | | | |
| | | | | | Neutral White 4200K | | | |
| | | | | | Cold White 5800K | | | |

*12V a richiesta - on request

RGB (Rosso, Verde, Blu) / RGB (Red, Green, Blue)

| LED/MT LED/MT | VOLT Vdc VOLT Vdc | TIPO LED TYPE OF LED | WATT/ MT WATT/ MT | FASCIO BEAM | COLORE LUCE LED** LED LIGHT COLOR** | UNITA' DI TAGLIO CUTTING UNIT | LUMEN/ MT LUMEN/ MT | LUMEN/ W LUMEN/ W |
|------------------|----------------------------|----------------------------|----------------------------|----------------|--|--|------------------------------|----------------------------|
| 100LED/mt | 24V | TOP LED 3528 FULL COLOR | 32W | 120° | Rosso, Verde, Blu Red, Green, Blue | 50 mm | | |

**DOTLESS SQUARE TOP
LED SMD 3528**

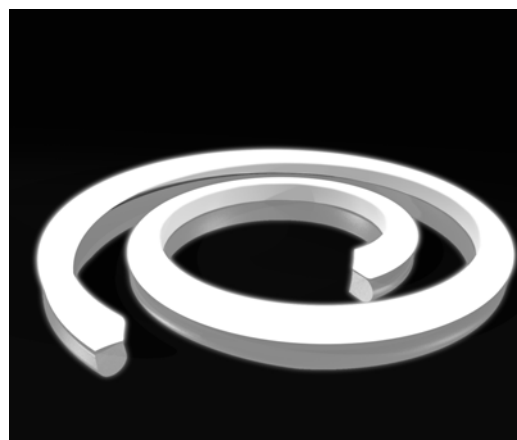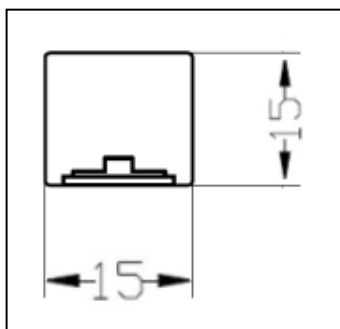

HEATLESS®

MONOCROMATICO / MONOCHROMATIC

| LED/MT LED/MT | VOLT Vdc VOLT Vdc | TIPO LED TYPE OF LED | WATT/ MT WATT/ MT | FASCIO BEAM | COLORE LUCE LED** LED LIGHT COLOR** | UNITA' DI TAGLIO CUTTING UNIT | LUMEN/ MT LUMEN/ MT | LUMEN/ W LUMEN/ W |
|------------------|----------------------------|-------------------------------------|----------------------------|----------------|---|--|------------------------------|----------------------------------|
| 120LED/mt | 24V* | TOP LED 3528 SUPER BRIGHTNESS | 14,4W | 120° | Bianco Caldo 3200K Bianco Neutro 4200K Bianco Freddo 5800K Warm White 3200K Neutral White 4200K Cold White 5800K | 50mm (24V) 25mm (12V) | 608 lm 640 lm 672 lm | 42,22 lm 44,44 lm 46,67 lm |

*12V a richiesta - on request

RGB (Rosso, Verde, Blu) / RGB (Red, Green, Blue)

| LED/MT LED/MT | VOLT Vdc VOLT Vdc | TIPO LED TYPE OF LED | WATT/ MT WATT/ MT | FASCIO BEAM | COLORE LUCE LED** LED LIGHT COLOR** | UNITA' DI TAGLIO CUTTING UNIT | LUMEN/ MT LUMEN/ MT | LUMEN/ W LUMEN/ W |
|------------------|----------------------------|----------------------------|----------------------------|----------------|--|--|------------------------------|----------------------------|
| 100LED/mt | 24V | TOP LED 3528 FULL COLOR | 32W | 120° | Rosso, Verde, Blu Red, Green, Blue | 50 mm | | |

IP67** – CLASS III



**escluse connessioni
**excluding connections

ACCESSORI A RICHIESTA / ACCESSORIES ON REQUEST



POWER SUPPLY



CONTROLLERS



CONNECTORS







CABLES



CAPS

DOTLESS ROUND TOP W/BASE
LED SMD 3528

Profilo fornito con base di fissaggio in silicone flessibile.
Profile supplied with fixing base in flexible silicone.

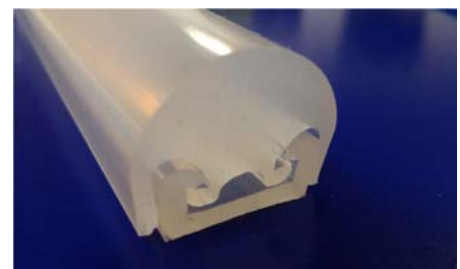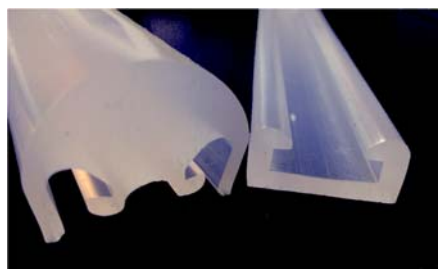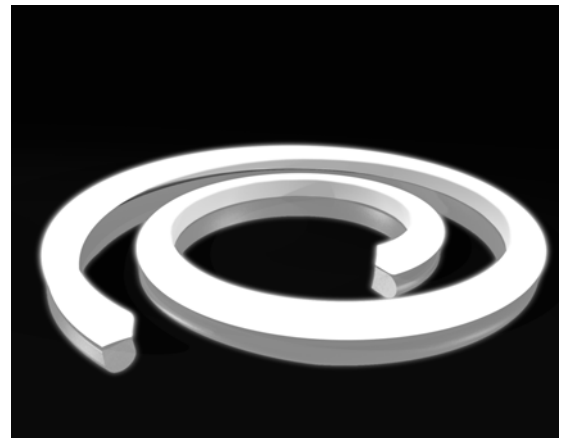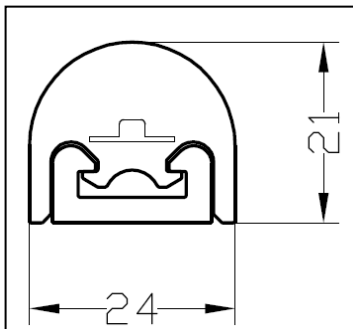

MONOCROMATICO / MONOCHROMATIC

| LED/MT LED/MT | VOLT Vdc VOLT Vdc | TIPO LED TYPE OF LED | WATT/ MT WATT/ MT | FASCIO BEAM | COLORE LUCE LED** LED LIGHT COLOR** | UNITA' DI TAGLIO CUTTING UNIT | LUMEN/ MT LUMEN/ MT | LUMEN/ W LUMEN/ W |
|------------------|----------------------------|-------------------------------------|----------------------------|----------------|---|--|------------------------------|----------------------------------|
| 120LED/mt | 24V* | TOP LED 3528 SUPER BRIGHTNESS | 14,4W | 120° | Bianco Caldo 3200K Bianco Neutro 4200K Bianco Freddo 5800K Warm White 3200K Neutral White 4200K Cold White 5800K | 50mm (24V) 25mm (12V) | 608 lm 640 lm 672 lm | 42,22 lm 44,44 lm 46,67 lm |

*12V a richiesta - on request

RGB (Rosso, Verde, Blu) / RGB (Red, Green, Blue)

| LED/MT LED/MT | VOLT Vdc VOLT Vdc | TIPO LED TYPE OF LED | WATT/ MT WATT/ MT | FASCIO BEAM | COLORE LUCE LED** LED LIGHT COLOR** | UNITA' DI TAGLIO CUTTING UNIT | LUMEN/ MT LUMEN/ MT | LUMEN/ W LUMEN/ W |
|------------------|----------------------------|----------------------------|----------------------------|----------------|--|--|------------------------------|----------------------------|
| 100LED/mt | 24V | TOP LED 3528 FULL COLOR | 32W | 120° | Rosso, Verde, Blu Red, Green, Blue | 50 mm | | |

IP67** – CLASS III



**escluse connessioni
**excluding connections

ACCESSORI A RICHIESTA / ACCESSORIES ON REQUEST



POWER SUPPLY



CONTROLLERS



CONNECTORS



CABLES



CAPS